

KM-640UBL SERIES

Long arm type, high speed, 1-needle, up & low feed, lock stitch sewing machine with automatic thread trimmer



For W24H service
www.swf-service.com

KM - 640UBL -

KM - 640 U		BL		-	
Type		Hook		Thread trimming & Motor	
U	Upgrade	BL	Large hook (x2 Capacity)	None	Non-thread trimming : Clutch motor
				7	Auto-thread trimming : Servo motor

Specification

Model		KM-640UBL-7	KM-640UBL
Application [material]		Heavy	Heavy
Max. sewing speed [spm]		2,000	2,000
Stitch length [mm]		0-9	0-9
Lift of the presser foot [mm]	Hand	8	8
	Knee	16	16
	Auto [Option]	16	-
Thread take up stroke [mm]		71.5	71.5
Needle bar stroke [mm]		34.7	34.7
Working area [mm]		335	335
Needle		DPx17 #22 (DBx1 #22)	DPx17 #22 (DBx1 #22)
Hook	Drive type	Rotary	Rotary
	Position	Vertical	Vertical
	Capacity	x2	x2
Lubrication		Auto	Auto
Thread roll		O	O
Auto thread trimming		O	-
Motor		Servo motor	Servo motor

Specifications and appearance of products are subject to change without notice for the performance improvement.




KM-640UBL SERIES

Long arm type, high speed, 1-needle, up & low feed, lock stitch sewing machine with automatic thread trimmer

OVERSEAS MARKETING DIVISION		OVERSEAS NETWORK					
SUNSTAR CO., LTD.		I SUNSTAR DELHI BRANCH OFFICE I		I SUNSTAR QINGDAO BRANCH OFFICE I		I SUNSTAR NANNING BRANCH OFFICE I	
#178-212, Gajwa-dong, Seo-gu, Incheon, Korea		tel: 91-120-4560057-8 fax: 91-120-4560059		tel: 86-532-6691-1991 fax: 86-532-6691-2262		tel: 86-771-386-6432 fax: 86-771-386-7432	
tel: 82-32-580-5600 fax: 82-32-584-3020		I SUNSTAR DHAKA BRANCH OFFICE I		I SUNSTAR NANJING BRANCH OFFICE I		I SUNSTAR NANCHANG BRANCH OFFICE I	
		tel: 88-02-881-9153 fax: 88-02-883-5707		tel: 86-25-8459-4758 fax: 86-25-8459-4408		tel: 86-791-384-9667 fax: 86-791-384-9663	
OVERSEAS NETWORK		I SUNSTAR CHITTAGONG BRANCH OFFICE I		I SUNSTAR HANGZHOU BRANCH OFFICE I		I SUNSTAR SHENYANG BRANCH OFFICE I	
SUNSTAR U.S.A. INC I		tel: 88-031-255-2497 fax: 88-031-255-2497		tel: 86-571-8577-9477 fax: 86-571-8577-9478		tel: 86-24-2366-3268 fax: 86-24-2366-3268	
el: 1-305-591-9596 fax: 1-305-591-0661		I SUNSTAR JAKARTA BRANCH OFFICE I		I SUNSTAR DONGGUAN BRANCH OFFICE I		I SUNSTAR HEFEI BRANCH OFFICE I	
SUNSTAR DO BRASIL LTDA I		tel: 62-21-4586-5839 fax: 62-21-4586-5840		tel: 86-769-2249-1610 fax: 86-769-2234-4042		tel: 86-551-424-8000 fax: 86-551-424-8000	
el: 55-11-3362-3434 fax: 55-11-3362-3444		I SUNSTAR HOCHIMINH BRANCH OFFICE I		I SUNSTAR ZHENGZHOU BRANCH OFFICE I		I SUNSTAR WUHAN BRANCH OFFICE I	
SUNSTAR MACHINERY EUROPE GMBH I		tel: 84-8-3592-3703 fax: 84-8-3592-3704		tel: 86-371-8606-8393 fax: 86-371-8606-8393		tel: 86-27-8375-3080 fax: 86-27-8375-0371	
el: 43-2236-660-229 fax: 43-2236-660-2293		I SUNSTAR HANOI BRANCH OFFICE I		I SUNSTAR TIANJIN BRANCH OFFICE I			
SUNSTAR BELARUS OFFICE I		tel: 84-4-2210-0560 fax: 84-4-6282-2433		tel: 86-22-6089-1737 fax: 86-22-6089-1737			
el: 375-17-237-1834		I SUNSTAR MACHINERY SHANGHAI CO.,LTD I		I SUNSTAR SHISHI BRANCH OFFICE I		WEB - SITE	
SUNSTAR MACHINERY SINGAPORE PTE LTD. I		tel: 86-21-6957-6308-6312 fax: 86-21-6957-6092		tel: 86-595-8858-881 fax: 86-595-8855-7874		www.sunstar.co.kr	
el: 65-6227-7545 fax: 65-6227-7905		I SUNSTAR MACHINERY SHANGHAI CO.,LTD I		I SUNSTAR CHENH DU BRANCH OFFICE I		E - MAIL	
SUNSTAR BANGALORE BRANCH OFFICE I		tel: 86-21-6353-2233 fax: 86-21-6353-8640		tel: 86-28-8311-7620 fax: 86-28-8312-7620		marketing@sunstar.co.kr	
el: 91-80-2653-0365-6 fax: 91-80-2653-0367							

SunStar SunStar CO., LTD.



SunStar


KM-640UBL

SERIES

Long arm type, high speed, 1-needle, up & low feed, lock stitch sewing machine with automatic thread trimmer

FEATURE


01

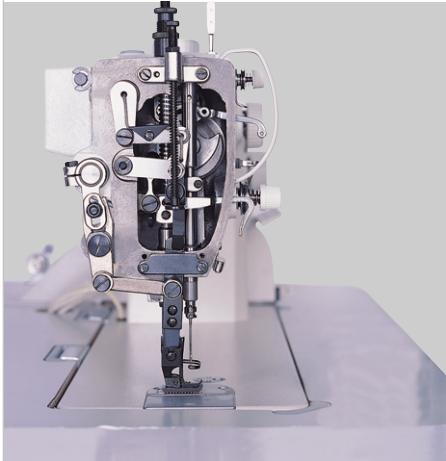

Optimized sewing condition for heavy duty materials

Pressure dual control system of presser foot and easy regulation of ascending amount of both main presser foot and auxiliary presser foot by dial are suitable for various sewing conditions such as the work for stepped and different thickness heavy duty material. With applying reliable feed mechanism, firm stitches and best quality are guaranteed.


02

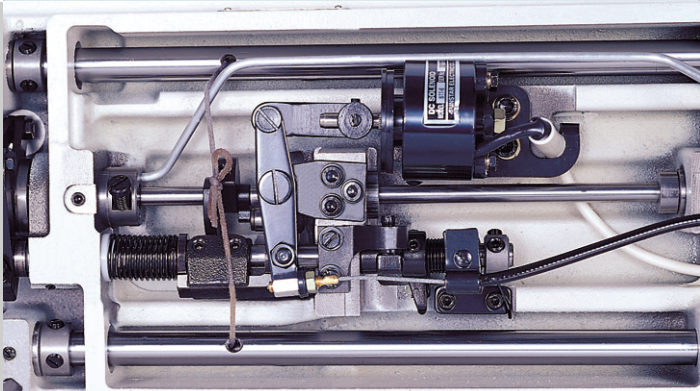

The best trimming mechanism for thick materials

The machine realizes structures of dual safety devices and strong trimming drive. The movable mes and fixed mes composed of special materials not only performs strong trimming drive but guarantees excellent anti abrasion with perfect quality as a sewing for thick materials. (KM-640UBL-7)

03

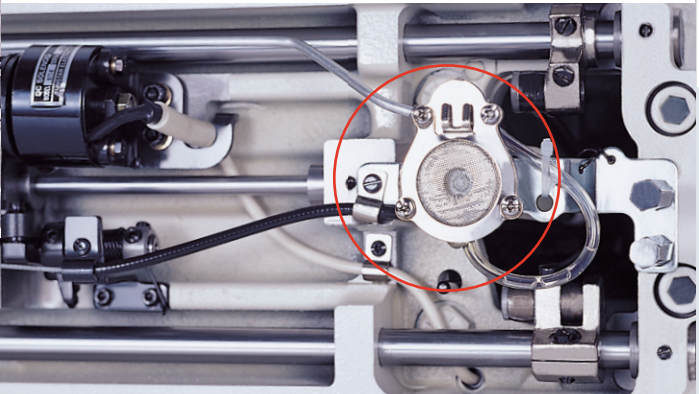

Full automatic oil supply system

Compulsory circulation type automatic oil supply system by pump enables the machino have dignity ae ts perfect sewing machine owing to its highly improved anti abrasion.

04



Large-sized pulley for work efficiency and precise position detector installed

The large-sized pulley suitable for control accurate needle position during starting and completing work provides the best efficiency in the sewing of thick materials. Handy position detector is also installed, which can adjust and divide each to the needle position of pulley. (KM-640UBL-7)

Long arm type ultra-modern one needle, drop feed, upper and lower feed, SunStar lockstitch sewing machine with an automatic thread trimmer

SunStar's long-arm type, single needle automatic trimming sewing machine can easily control any aterials by its large-sized arm and bed with strong power. It highly and fast improves productivity by installing newly developed Fortuna AC servo motor series 5 automatic trimming motor. Also, it is designed to easily adjust the ascending amount of presser foot by dial that gives great pleasure and satisfaction.

FORTUNA 5

■ Installed the Fortuna AC servo motor Series 5 with up-to-date functions!!

Model	Input Phase	Main Functions	Standard Parts
S3AC55 - 1 <input type="checkbox"/>	1Ø 110V	<ul style="list-style-type: none">Simple speed changing function using the program unitCategorized speed adjustment of start / end back tack	<ul style="list-style-type: none">SynchronizerPedal connecting rodPower switch box etc.
S3AC55 - 2 <input type="checkbox"/>	1Ø 220V	<ul style="list-style-type: none">Adjustment of sewing machine speed increase curveAdjustment of the remaining upper thread's length after thread trimming	
S3AC55 - 3 <input type="checkbox"/>	3Ø 220V	<ul style="list-style-type: none">Adjustment of the pressure for pedal operation	

